

Goodspeed *ACTIVE* court

(Formerly known as PORPLASTIC ACTIVE court)

Only one layer/ water-permeable/ available in many colours

THE FAST AND SIMPLE MULTI COURT

Application Fields


Tennis courts

Ideal for revitalisation

Simple small fields

Multi purpose fields

Decorative areas

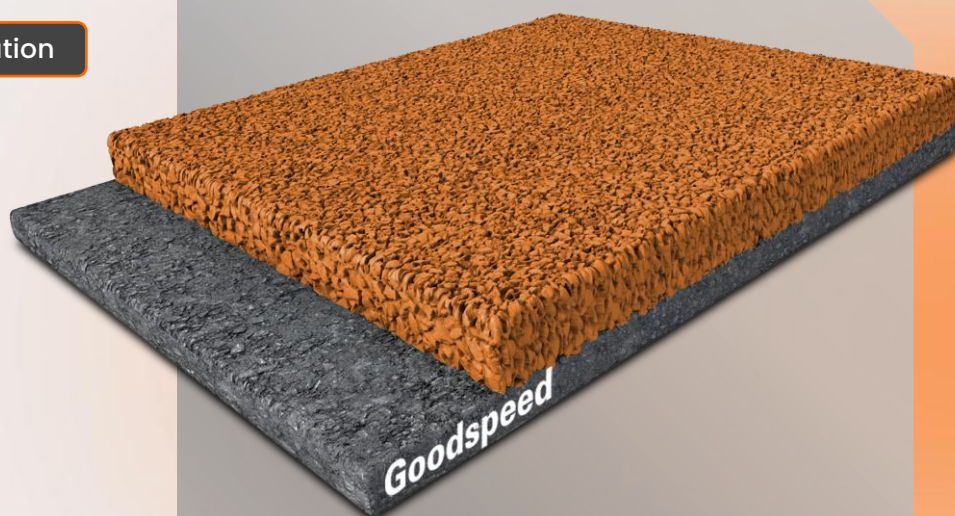

Extremely abrasion
resistance



Water
permeable



Available in many
colours

Performance check



Resistance to
wear of 1.47g



Shock absorption
34%



Elongation at break
52%



Tensile Strength
0.62N/ mm²



Friction of dry: 103
wet: 56



Ball reflexion 101%



Vertical deformation
of 1.70mm



Environmental
requirement



Available in many
colours




Water-permeable







Weather resistant



UV Resistant



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8090		20 – 30 g/lfm	ca. 0.10 – 0.20 mm	Spray
UV-SEALER (optional) Goodspeed S6020		0.17 – 0.20 kg/m ² per layer	ca. 0.10 – 0.20 mm	Spray, in 2 layers
BASE-LAYER Goodspeed T770/T776 Goodspeed EPDM (1-4mm)		2 – 4 kg/m ² 10 – 20 kg/m ²	ca. 10 – 20 mm	Paving-Machine
PRIMER (asphalt) Goodspeed P270		0.15 – 0.20 kg/m ²	ca. 0.10 mm	Roll or Spray

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

