

Goodspeed

ACTIVE game + track

(Formerly known as PORPLASTIC ACTIVE game + track)

Available in two layers / water-permeable / many colours

EXPERT FOR BALL GAMES


Application Fields

Playground Multi-purpose playing fields

Running tracks for use in mass sports

School sports facilities

Small playing fields

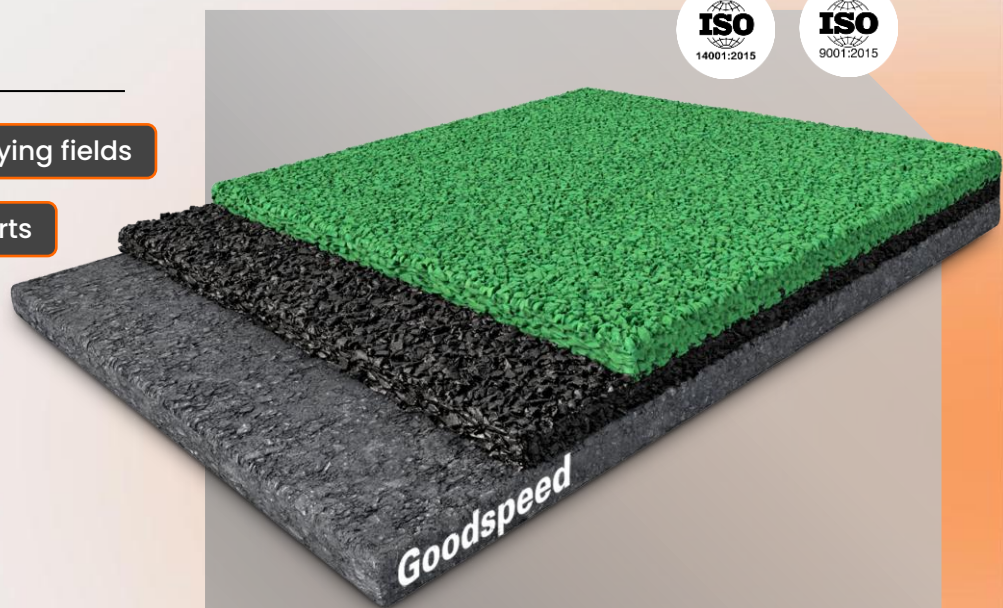

Extremely abrasion resistance



Water permeable



UV resistant

Performance check



Resistant to wear
1.47g



Shock absorption
49%



Elongation at Break
of 45%



Tensile Strength
of 0.54 N/mm²



Friction dry: 103
wet 56



Ball reflexion 101%



Vertical deformation
of 2.70 mm



Environmental
requirements



Available in many
colours




Water-permeable








Weather-resistant



UV Resistant



Layer		Consumption	Thickness	Application
LINE PAINT (optional) Goodspeed X8090		20 – 30 g/lfm	ca. 0.10 – 0.20 mm	Spray
UV-SEALER Goodspeed S6020		0.17 – 0.20 kg/m ² per layer	ca. 0.10 mm	Spray, in 2 layers
WEARING LAYER Goodspeed T770 Goodspeed EPDM (1-4mm)		1.20 – 1.60 kg/m ² 6 – 8 kg/m ²	ca. 6 – 8 mm	Paving machine
ELASTIC LAYER Goodspeed T770 Goodspeed SBR (1-4mm)		1 – 1.50 kg/m ² 6 – 8 kg/m ²	ca. 9 – 12 mm	Paving machine
PRIMER(asphalt) Goodspeed P270		0.15 – 0.20 kg/m ²	ca. 0.10 mm	Roll or spray

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

