

Goodspeed *ACTIVE multitop*

(Formerly known as PORPLASTIC ACTIVE multitop)

Elastic mat / resistant anti-skid coating / water-impermeable / many colour

OUTDOOR ALL-ROUNDER


Application Fields

Running tracks

Playground surfaces

Multi-purpose playing fields

Small playing fields

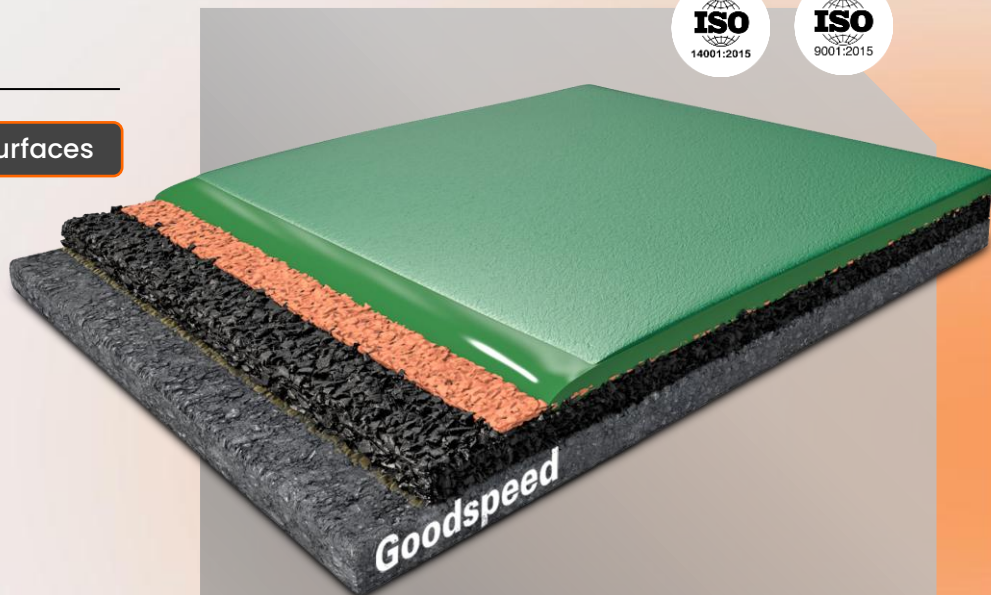

ANTI-SKID coating



Water impermeable



Elastic mat

Performance check



Abrasion resistant



Shock absorption
28%



Water impermeable



Tensile strength
of $>0.48 \text{ N/mm}^2$



Friction of 100



Ball reflexion $>96\%$



Vertical deformation
of 1.00 mm









Resistance to
rolling load 1500 N



Available in many
colours



Layer		Consumption	Thickness	Application
LINE PAINT (optional) Goodspeed X8085 SR		0.20 – 0.30 kg/m ²	ca. 0.10 mm	Spray
ANTI-SKID COATING Goodspeed S6085 SR		540 g (2 layers) 900 g (3 layers)	ca. 0.30 mm ca. 0.50 mm	Notched squeegee
SELF-LEVELLING LAYER Goodspeed C524		2.40 – 4 kg/m ²	ca. 2 – 3 mm	Squeegee or trowel
PORE SEALER Goodspeed L370		1.10 – 1.80 kg/m ²	ca. 0.10 mm	Squeegee
ELASTIC LAYER+GLUE Goodspeed basic mat Goodspeed B976		– ca. 0.80 kg/m ²	ca. 4 – 10mm	Cut and embed in fresh adhesive notched trowel
PRIMER (asphalt) Goodspeed P270		0.15 – 0.20kg/m ²	ca. 0.10 mm	Roll or spray

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

