

Goodspeed *ACTIVE track*

(Formerly known as PORPLASTIC ACTIVE track)

Elastic Outdoor-Flooring-System: excellent shock absorbance for joint-friendly running


Application Fields

Bike-tracks

Pump-tracks

Running and fun tracks

Roller-blading tracks

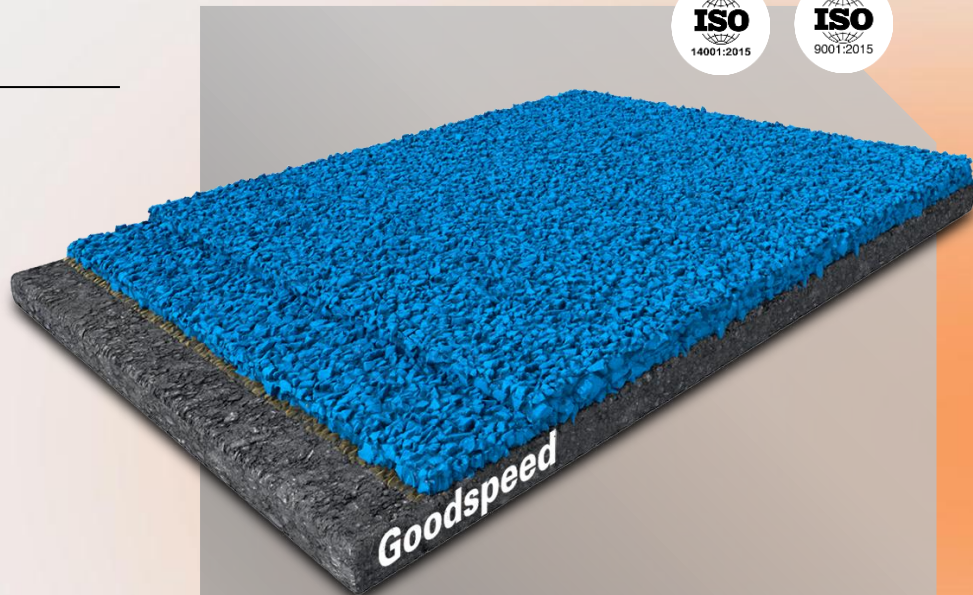

Non-skid



Permanent elasticity



Many colours

Performance check



Water impermeable



Jointless system







Anti-skid Granulated Surface



Available in many colours



Layer		Consumption	Thickness	Application
LINE PAINT (optional) Goodspeed X8090		0.20 – 0.30 g/lfm ²	ca. 0.10 mm	Spray
UV-SEALER (optional) Goodspeed S6020 P		0.17 – 0.20 kg/m ² per layers	ca. 0.10 – 0.20 mm	Spray, in 2 layers
WEARING LAYER Goodspeed C570 Goodspeed EPDM (1-3, 5mm)		ca. 2.50 kg/m ² ca. 4.00 kg/m ²	ca. 5 mm	Paving machine
ELASTIC LAYER Goodspeed C570 Goodspeed EPDM (1-3, 5mm)		ca. 3 kg/m ² ca. 5 kg/m ²	ca. 5 mm	Paving machine

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

