

Goodspeed

INDOOR CEL combi

(Formerly known as PORPLASTIC INDOOR CEL combi)


Combined elastic sports flooring system for school and multipurpose use, according to EN 14904, for indoor use

Application Fields

Sport halls

School sports halls

Multi-purpose leisure hall

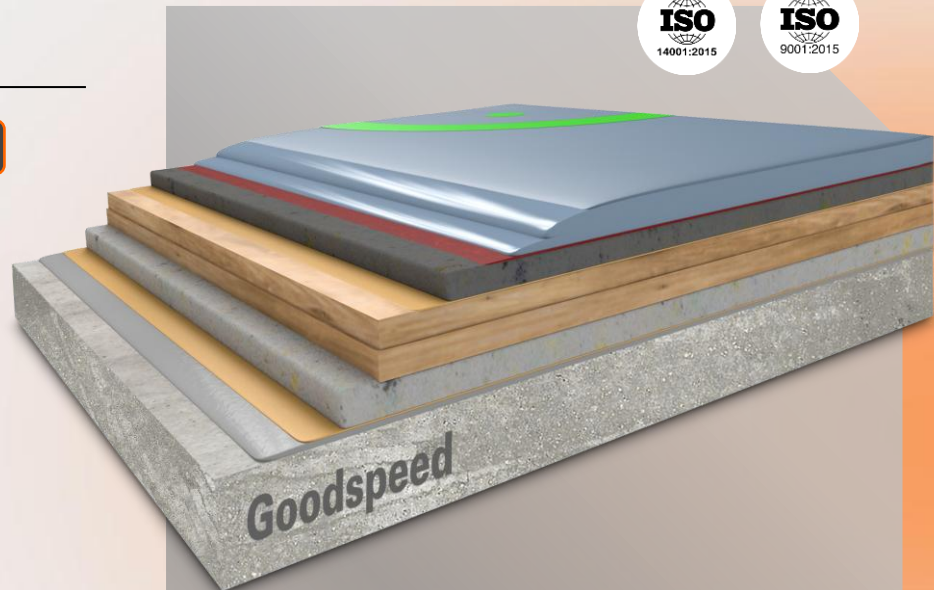

EN14904 certified



Low emissions



Available in many colours

Performance check



Gloss of 32%



Ball rebound > 90%



Shock absorption >55%



Vertical deformation >2.90mm



Abrasion resistance of 20mg



Available in many colours



Water impermeable









Low emissions



EN14904 certified



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8005		10 – 15 g/lfm	ca. 0.10 – 0.20mm	Roller or brush
FLEXIBLE TOP FINISH Goodspeed S6000P		0.12 – 0.15 kg/m²	ca. 0.10 mm	Roller
SELF-LEVELING LAYER Goodspeed C524		2 – 3 kg/m²	ca. 2 – 3 mm	Notched squeegee
PORE SEALER Goodspeed L375		ca. 0.60 kg/m²	ca. 0.10 – 0.20 mm	Rubber squeegee or metal trowel
ELASTIC MAT + ADHESIVE Goodspeed PEL-Matte Goodspeed B976		ca. 0.80 kg/m² (adhesive)	ca. 4 – 10 mm (Elastic mat)	Cut and embed in fresh adhesive Notched trowel
UNDER-CONSTRUCTION Plywood Foam pad		-	ca. 15 mm	Laid in plates or as roll

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

