

# Goodspeed

## INDOOR MEL compound

(Formerly known as PORPLASTIC INDOOR MEL compound)


Sports flooring system for school and multipurpose use, mixed elastic according to EN14904

### Application Fields

Sport halls

School sports halls

Multi-purpose leisure hall

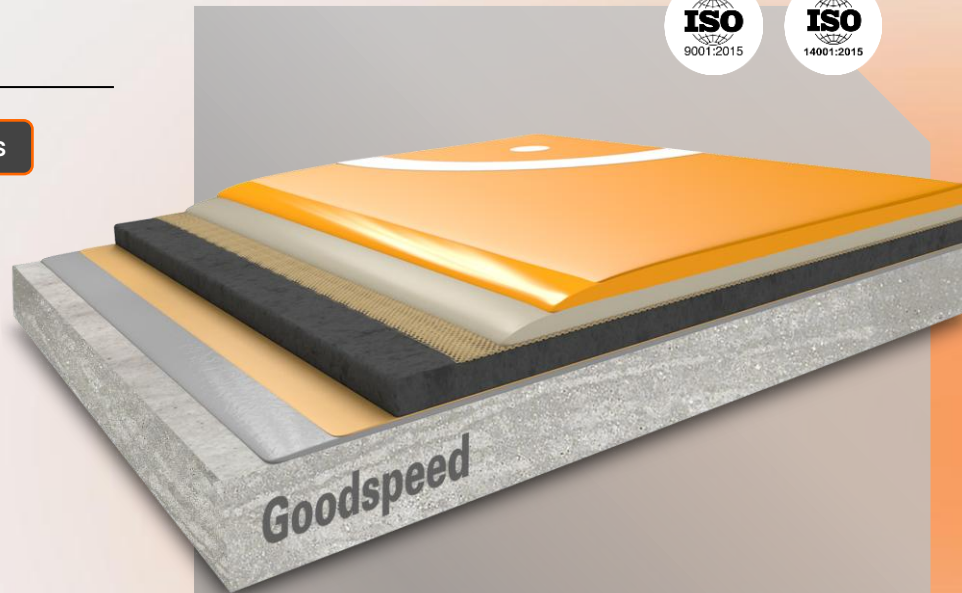

TÜV PROFICERT



EN14904 certified



Available in many colours

### Performance check



Gloss of 28-30%



Ball rebound > 99%



Shock absorption 57%



Permanent Elasticity



Abrasion resistance of 15mg



Available in many colours



Water impermeable










Impact resistance of 16Nm



Sliding properties of 107



Layer		Consumption	Thickness	Application
<b>LINE PAINT</b> Goodspeed X8005		10 – 15 g/lfm	ca. 0.10 – 0.20 mm	Roller or brush
<b>FLEXIBLE TOP FINISH</b> Goodspeed S6000P		0.10 – 0.13 kg/m <sup>2</sup>	ca. 0.05 – 0.10 mm	roller
<b>ELASTIC LAYER</b> Goodspeed C524		2.50 – 3 kg/m <sup>2</sup>	ca. 2 – 3 mm	Notched squeegee
<b>LOAD-DISTRIBUTION</b> Goodspeed L324		2 kg/m <sup>2</sup>	ca. 2 mm	Notched squeegee
<b>PORE SEALER</b> Goodspeed L375		ca. 1 kg/m <sup>2</sup>	ca. 0.10 – 0.20 mm	Rubber squeegee or metal trowel
<b>ELASTIC MAT+ADHESIVE</b> Goodspeed MAT Goodspeed B976		ca. 0.80 kg/m <sup>2</sup> (Adhesive)	ca. 10 – 12 mm (Elastic mat)	Cut and embed in fresh adhesive Notched trowel
<b>PRIMER</b> FLOORFINDER EP-P210		ca. 0.40 kg/m <sup>2</sup>	ca. 0.20 mm	Roller or rubber squeegee

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see [www.porplastic.com](http://www.porplastic.com) or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

