

Goodspeed *INDOOR sky*

(Formerly known as PORPLASTIC INDOOR sky)

Decorative flooring system with 3D effect for school and multipurpose sports halls, point-, mixed or combined elastic according to EN 14904













Application Fields

Sport halls

School sports halls

Multi-purpose leisure hall

Colour Possibilities

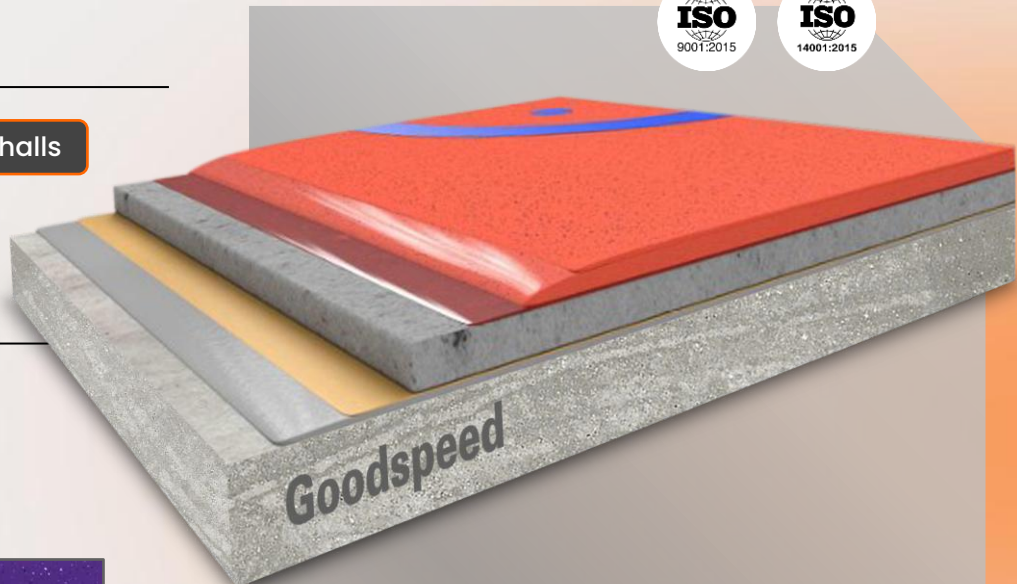

For all systems



Decorative with
3D effect



Available in many
colours

Performance check



Water
impermeable



Beautiful sprinkled
appearance



Permanent Elasticity



For coverings
<10mm thickness



Fulfil requirements
of AgBB for VOC
emission



Good scratch and
abrasion resistant



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8005 		10 – 15 g/lfm	ca. 0.10 – 0.20 mm	Roller or brush
FLEXIBLE TOP FINISH Goodspeed S6000 		0.09 – 0.11 kg/m ²	ca. 0.05 – 0.10 mm	Roller and rubber squeegee
SELF LEVELING LAYER Goodspeed C524 		2 – 3 kg/m ²	ca. 2 – 3 mm	Notched trowel

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

