

Goodspeed *M olympic*

(Formerly known as PORPLASTIC M olympic)

Massive, one or multilayer full PU-bound system spread with coloured EPDM granules, water-impermeable

PROFESSIONAL SPORTS SURFACE

Application Fields

Running tracks

Run up tracks


Athletic sport areas type A,B,C

Short distance tracks

High-performance sport

International competitions

Olympia, world championships

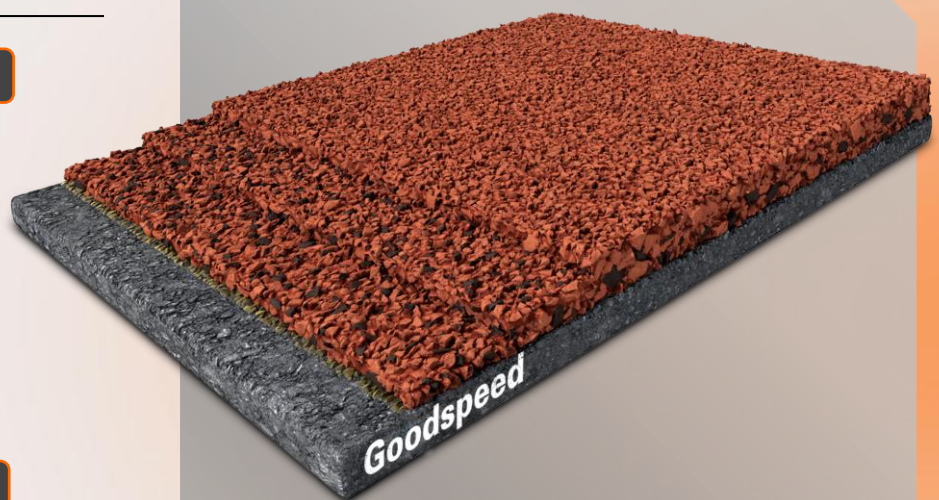

WA Certified



Low Emission



Very Durable

Performance check



WA certified
15 mm



Shock absorption
38%



Elongation at break
of 80%



Tensile strength
of 0.53 N/mm²



Friction of 64



Spike resistance



Vertical deformation
of 1.80 mm









Environmentally
friendly



Available in many
colours



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8090		20 –30 g/lfm	ca. 0.10 – 0.20 mm	Spray
UV-SEALER (optional) Goodspeed S6020		0.17 –0.20 per layer	ca. 0.10 mm	Spray, In 2 layers
WEARING LAYER Goodspeed C570 Goodspeed EPDM (1 – 4mm)		ca. 2.80 kg/m ² 2.80 net 4.00 total	ca. 3 –5 mm	Notched squeegee, broadcast, remove excess
2. CAST COATING Goodspeed C570 Goodspeed SBR (1 – 4mm)		ca. 3 kg/m ² 3.00net 3.50 total	ca. 5 mm	Notched squeegee, broadcast, remove excess
1. CAST COATING Goodspeed C570 Goodspeed SBR (1 – 4mm)		3 – 3.50 kg/m ² 3.00net 3.50 total	ca. 5 mm	Notched squeegee, broadcast, remove excess
PRIMER Goodspeed P270 (for asphalt)		0.15 – 0.20 kg/m ²	ca. 0.10 mm	Roll or spray

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

