

Goodspeed *SB economic*

(Formerly known as PORPLASTIC SB economic)

Elastic base mat with coloured spray coating for competition, water-permeable

RELIABLE AND LONG-LASTING

Application Fields

Running tracks

Run up tracks


Short distance tracks

Athletic sport areas type B,C

International competitions

Ideal for revitalisation and renovation

Sport fields

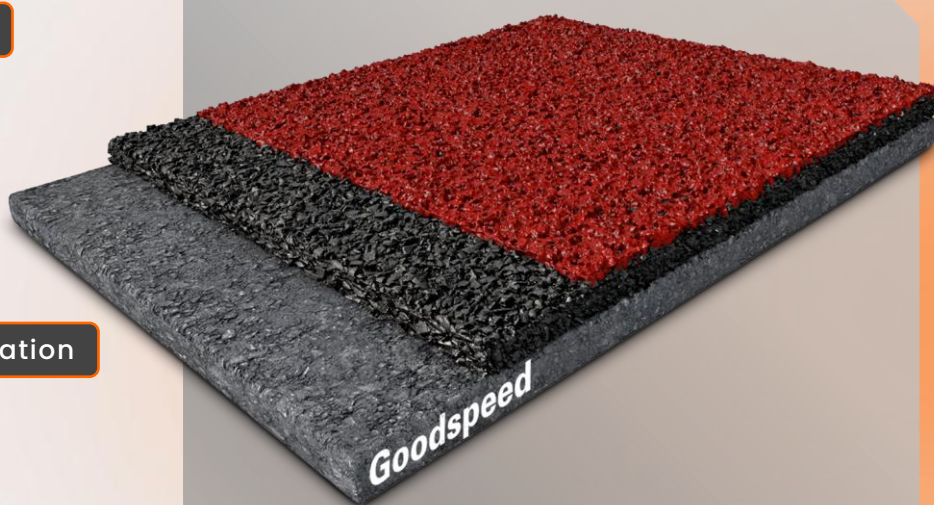

WA Certified



Spray Coating



Available in many colours

Performance check



WA certified
12.2 mm



Shock absorption
41%



Elongation at break
of 46%



Tensile strength
of 0.47 N/mm²



Friction of 51



Spike resistance



Vertical deformation
of 2.30 mm



Environmentally
friendly



Available in many
colours



Water permeable








Anti-skid granulated
surface



tested according
EN 14877 and DIN
18035-6



Layer		Consumption	Thickness	Application
LINE PAINT (optional) Goodspeed X8090		20 –30 g/lfm	ca. 0.10 – 0.20 mm	Spray
UV-SEALER Goodspeed S6020		0.17 –0.20 per layer	ca. 0.10 mm – 0.20mm	Spray, In 2 layers
SPRAY COATING (structural) Goodspeed S670/S675 Goodspeed EPDM (0.5–1.5) + POWDER		ca. 1.20 kg/m ² ca. 0.80 kg/m ² ca. 0.10 kg/m ²	ca. 1 –2 mm	Spray, In 2 layers
ELASTIC LAYER Goodspeed T770 /T776 Goodspeed SBR (1–4mm)		1.4 – 1.80 kg/m ² 7.5 – 10 kg/m ²	ca. 11 – 15 mm	Paving machine
PRIMER Goodspeed P270		0.15 – 0.20 kg/m ²	ca. 0.10 mm	Roll or spray

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

