


Goodspeed *TENNIS comfort*

(Formerly known as PORPLASTIC TENNIS comfort)

Tennis court flooring system for indoor and outdoor point-elastic according to EN 14904, ITF classified

Application Fields

Tennis halls indoor/outdoor

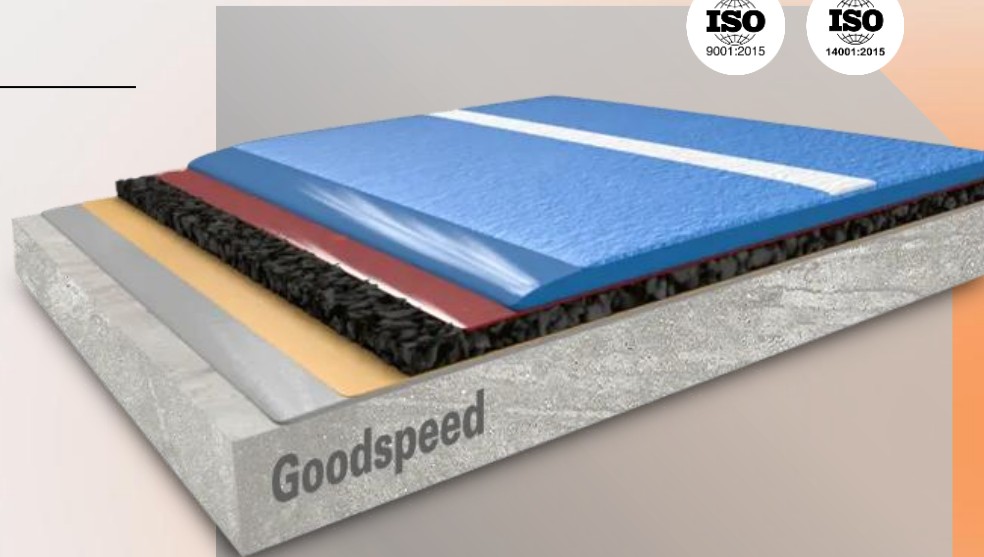

Very Durable



Low Maintenance



Equal ball reflection

Performance check



Water impermeable



Good scratch and abrasion resistance



Low maintenance



Available in many colours



Easy to clean



Equal ball reflection



Permanent elasticity









Shock absorption of 17 - 30%



ITF certified



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8085 SR		20 – 30 g/lfm	ca. 0.10 – 0.20 mm	Roller or brush
STRUCTURED TOP FINISH Goodspeed S6085 SR		2 layers 540 g 3 layers 900 g	ca. 0.30 mm ca. 0.50 mm	Rubber squeegee
SELF LEVELING LAYER Goodspeed C524		ca. 2.00 kg/m ²	ca. 1.50 mm	Notched squeegee
PORE SEALER Goodspeed L375		ca. 0.60 kg/m ²	ca. 0.10 – 0.20 mm	Rubber squeegee or metal trowel
ELASTIC MAT + ADHESIVE Goodspeed basic mat Goodspeed B976		- ca. 0.80 kg/m ²	ca. 4 – 10 mm -	Cut and embed in fresh adhesive notched trowel
PRIMER FLOORFINDER EP-P210		ca. 0.40 kg/m ²	ca. 1.50 mm	Roller or rubber squeegee

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

