

Goodspeed *FUN 60*

(Formerly known as PORPLASTIC FUN 60)

Elastic and decorative surfaces for playgrounds,
critical fall height 1.54m

CREATIVITY AND SAFETY- JOINTLESS AND BOUNDLESS

Application Fields


Playgrounds

Play zones in school

Walkways in kindergartens or schools

Toddler zones in open air baths

Coating of concrete green bodies

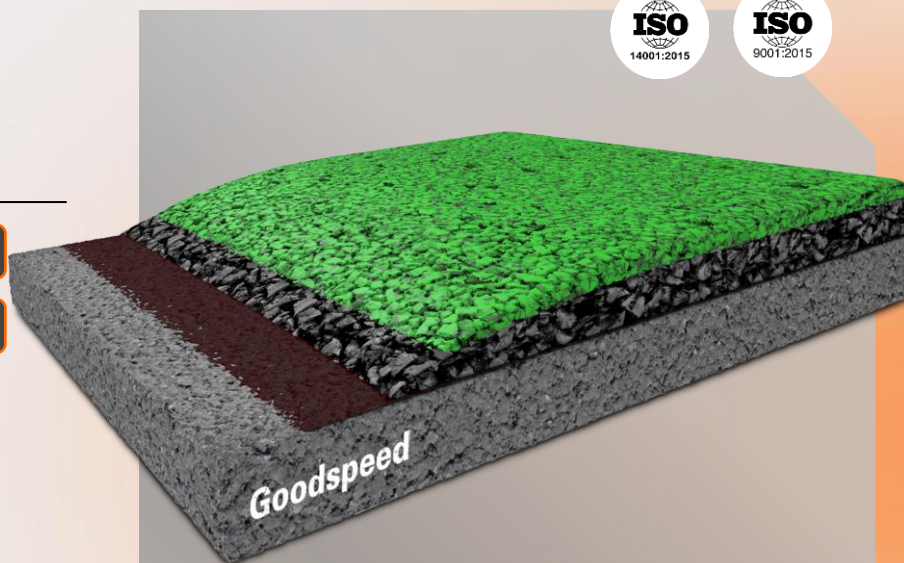

Critical fall height
= 1.54m



Hygienic



Creative use of colours

Performance check



Hygienic



Easy to clean with
high pressure
stream heater



UV sealer
recommended for
sensitive colour



Jointless



Total thickness
60 – 65 mm



Critical fall height
1.54 m



Excellent shock
absorption when fall



Water-permeable




Available in many
colours







Weather-resistant



Tested
according DIN
EN 1177:2018



| Layer | | Consumption | Thickness | Application |
|--|---|--|----------------|--------------------------|
| WEARING LAYER Goodspeed T760/T770 Goodspeed EPDM (1-4mm) |  | 2 – 3 kg/m ² 10 – 15 kg/m ² | ca. 10 – 15 mm | Manual or paving machine |
| HIGHLY ELASTIC LAYER Goodspeed T770/T776 Goodspeed SBR (2-8mm) |  | ca. 3 kg/m ² ca. 31 – 23 kg/m ² | ca. 50 mm | Manual or paving machine |
| PRIMER Goodspeed P270 (for asphalt) |  | 0.15 – 0.20 kg/m ² | ca. 0.10 mm | Roll or Spray |
| PRIMER Goodspeed P274 (for concrete) |  | 0.10 – 0.20 kg/m ² | ca. 0.10 mm | Roll or Spray |

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

